

QA HYDRAULIC QUICK ARDEN 05H-62BH QUICK HITCH




More safety for this new quick release range

The **Quick Arden (QA)** quick hitch system allows **quick change of different attachments** on a hydraulic excavator or a backhoe loader.


These self-locking quick hitches **are fitted to all excavators from 0.8 to 37 tons** and meet current safety standards.



View of a
Quick Arden H

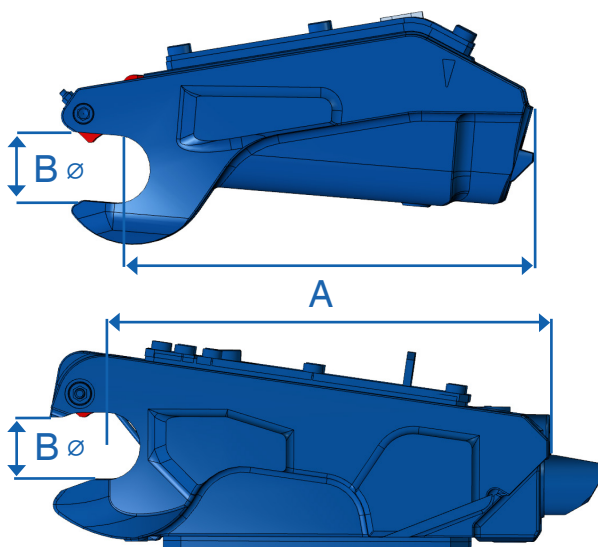

View of a
QA05-H

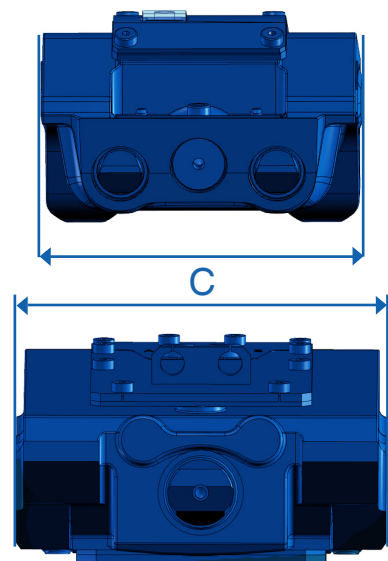

View of
QA13-H
QA23-H
QA33-H
QA42AH
QA53-H
QA62BH

t	Reference	KG Kg	A mm	B mm	C mm	Pressure		Flow rate	
						bar		l/min	
						min	max	min	max
0,8 - 3,5	QA05-H**	25	240	40	184	70	250	5	10
2,6 - 6	QA13-H	50	290	45	224,5	210	350	10	30
6 - 12	QA23-H	75	347	55	269,5	210	350	10	30
12 - 16	QA33-H	140	408	65	331,5	210	350	10	30
16 - 20	QA42AH	180	454	75	383,5	210	350	10	30
20 - 27	QA53-H	280	500	85	424,5	210	350	10	30
27 - 37	QA62BH	430	561	100	579,5	210	350	10	30



* The data, including weight, is provided for reference only and may vary depending on the adaptations on the excavator.

** Single effect circuit



Features


- ✓ Automatic play compensation
- ✓ Use in backhoe or shovel configuration depending on model
- ✓ Pressure reduction valve on the cylinder
- ✓ Handling hole for shackles
- ✓ Cast steel base and mechanism
- ✓ Security with locking paddle and indicator visible from the cab

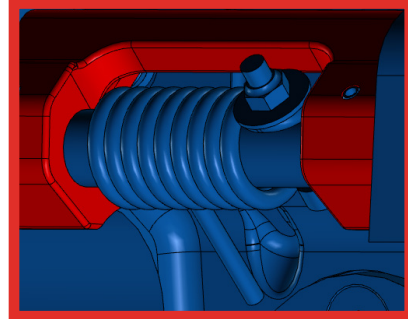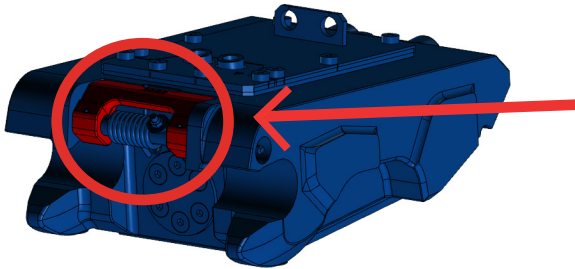

Options

Hydraulic Quick Arden (QA) are available with different options.

+ Integrated hook with latch

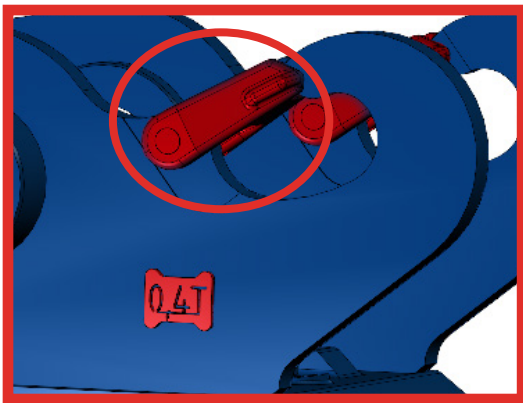

+ Hydraulic circuit kit



QA05H Single effect hydraulic line
QA13H - QA62BH Double effect hydraulic line

Standards

QA hydraulic quick hitches meet the following standards:

- ✓ EN 474-1:2022
- ✓ EN 474-(4&5):2022
- ✓ ISO 13031:2016
- ✓ EG Directive machines 2006/42/CE



Technical data and visuals are non-contractual and subject to change without prior notice.



+33 (0)3 24 33 64 30



contact@arden-equipment.com



9 avenue de l'Industrie FR - 08000 Charleville-Mézières



www.arden-equipment.com

