

# RETRO BUCKET

## GENERAL USAGE - SEVERE USAGE



### *Different uses to suit your needs*

The excavator Buckets are available for work with excavators from 1,1 to 10 tons. There are different configurations of buckets:

#### **Retro bucket general usage (UG)**

This bucket is designed for earthworks in soft and mediumhard materials such as clay or soil. It is fitted with standard Arden Equipment teeth.

#### **Retro bucket severe usage (US)**

They are suitable for excavating compact and abrasive materials such as sand or limestone. They are equipped with standard teeth.

To strengthen the bucket and increase its service life, the US version offers according to the models

- ✓ Side protections with a higher tooth mount
- ✓ Larger sheet thicknesses
- ✓ Commas
- ✓ Belts or a double bottom.

All models contribute to increased safety thanks to their design that allows them to be laid flat on the ground.

#### **Characteristics**

- ✓ Adaptable for excavators from 1. 1 to 11 tons.
- ✓ Compatible with QA / UA / AECW / AES / AT /ATR quick couplings.
- ✓ Optimum penetration and filling.
- ✓ Respect of the original kinematics manufacturer.
- ✓ Bucket stability for quick and easy recovery.
- ✓ Available with Arden teeth.

Security

Versatility

Compatibility

Robustness

#### **Options :**


##### **Reversibility**

Reversibility option has been added for buckets in QA, CW, AES, UA mode.



## Technical diagram

View of a R20

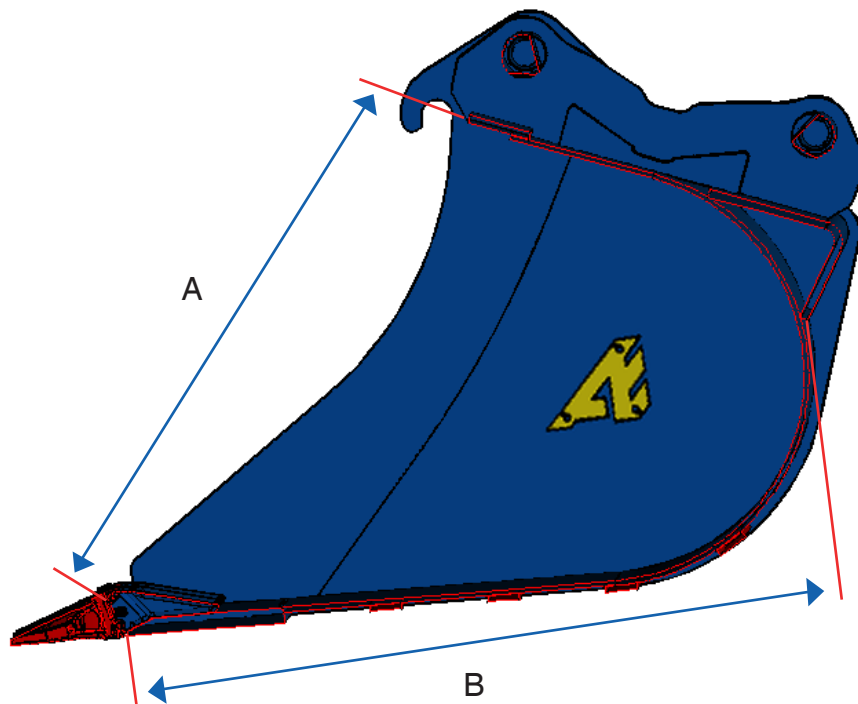

	Reference		KG *		A	B	Length / Capacity	
			min	max			min	max
t **	General usage	Severe usage	kg	kg	mm	mm	mm/lt	mm/lt
1.1 à 1.4	R05G05	R05S05	30	39	272	347	205/11	400/24
1.5 à 2	R05G11	R05S11	34	64	373	416	205/20	600/65
2.1 à 3	R05G31	R05S31	39	71	478	468	205/25	600/90
3.1 à 3.5	R05G42	R05S42	70	136	587	647	300/65	800/195
2.6 à 3	R10G12	R10S12	59	108	448	488	250/35	700/110
3.1 à 4.9	R10G22	R10S22	77	136	587	647	300/65	800/195
5 à 6	R10G32	R10S32	84	143	657	696	300/75	800/235
6 à 7.5**	R20G08	R20S08	137	280	507	645	300/60	1000/280
6 à 7.5	R20G12	R20S12	142	287	686	806	300/90	1000/360
8 à 10	R20G22	R20S22	154	305	794	884	300/110	1000/450
10 à 11	R25G22	R25S22	209	395	794	884	400/150	1100/505

\* Weight with QA and AE teeth

\*\* Special version to reduce the radius of the bucket when mounted with an AT

Possibility for some models to benefit from parallel sides: contact us



+33 (0)3 24 33 64 30



contact@arden-equipment.com



9 avenue de l'Industrie FR - 08000 Charleville-Mézières



www.arden-equipment.com

