

**FEATURES:** 

The Multi-Tine Grabs **GA** are adaptable for excavators from 6 to 90 tons and for truck version from 8 to 24 tons.

With their **reinforced tines** and their **cylinder stems protected** by **armouring** in **cast steel**, these multi-tine grabs are especially strong, even in the most extreme use conditions.

This excellent strength can also be explained by **pins** that have been **improved** using **high frequency treatment**, **pin passages fitted with rings** and a **motor** + **crown rotation adapted to the excavator lifting capacity**.

The entire product line has **frames** manufactured using **High Elastic Limit steel** (HEL), and all the **tips** made from cast steel are **removable and interchangeable** over the entire product line, allowing for fast and easy maintenance.

SECURITY
PERFORMANCE
VERSATILITY

**ADAPTED DEVICE** 

**ROBUST CONSTRUCTION** 

## **ADVANTAGES:**


- Adaptable for excavators from 6 to 90 tons and for truck version from 8 to 24 tons.
- Strong and reliable
- Fully customisable
- Easy maintenance
- 2 special crane truck versions
- Available with 3, 4, or 5 tines


## **OPTIONS:**

Reinforced cylinder protection Hydraulic hose protection





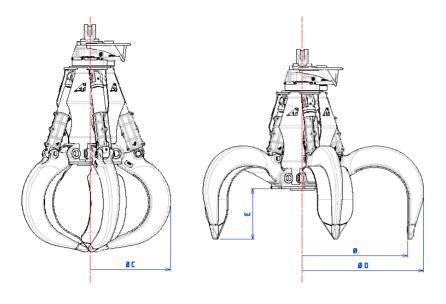



a: vertically 1/2 closed b: horizontally 1/2 closed


c: fully closed

d: special stone placing

## **TECHNICAL CHARACTERISTICS**

Technical specifications								
Carrier weightı		Reference	Capacity	E Height under frame	Ø Inner open diameter	Ø C Closed diameter	Ø D Open outer measurement	Tool weight <sup>2</sup>
Carrier <sup>1</sup> t	Truck version <sup>1</sup> t	Ref	1	mm	mm > mm	mm > mm	mm > mm	kg > kg
6 - 7	8 - 15	GP200	270	435	1500	1195	1785	410 > 515
8 - 10	16 - 24	GP251	270	435	1500	1195	1785	435 > 540
12 - 15		G0951	360	430	1750	1342	1916	700 > 855
16 - 24		GA452	400 > 800	460 > 545	1800 > 2200	1345 > 1670	2140 > 2465	1170 > 1585
24 - 31		GA550	800 > 1000	545 > 590	2200 > 2400	1620 > 1780	2500 > 2735	1555 > 2050
31 - 45		G1851	780 > 1500	700 > 879	2400 > 3000	1770 > 1968	2700 > 3340	2550 > 3610
46 - 53		G7081	2200	780	3200	2270	3570	3470 > 4190
50 - 90		GA800	3800	949	3700	2830	3620	6170 > 6480
50 - 90		2x4 tines	8 tines grab 2500L - 3000L. Contact Us.					

## **Suspension links**

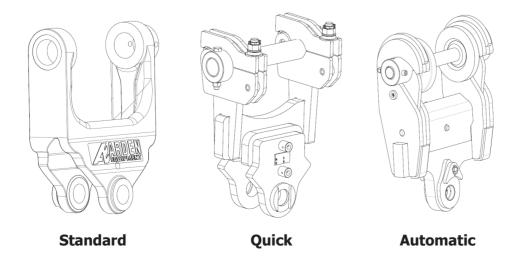

Tel. +33 (0)3 24 33 64 30 - contact@arden-equipment.com - www.arden-equipment.com

 $<sup>^1</sup>$  Varies depending on the carrier type (mini digger/crane truck) - Contact us.  $^2$  The weight varies depending on the tine type mounted on the frame - weight without universal joint for the 5 tines version