

HYDRAULIC SCRAP SHEARS

AS014
AS021
AS030
AS042
AS055
AS073



FEATURES

The Hydraulic Scrap Shears **AS014, AS021, AS030, AS042, AS055, AS073, AS093** are adaptable for work with excavators from 9 to 90 tons.

They can be **directly fitted to the arm** (with a bolted plate) or **on the boom** thanks to a fitted rotation.

Our shears are fitted with **360° hydraulic rotation** driven by one or more motors (drainless motor).

Their **High Elasticity Limit steel lightweight structure and anti-abrasion steel** on the zones in contact with the material are especially strong.

The shear **cylinders** are **inverted**, making it possible to fully protect the piston stem inside the body itself.

The tool's **central articulation** is **banded** and provides effective gap compensation.

PERFORMANCE

RELIABILITY

VERSATILITY

ROBUST CONSTRUCTION


ADVANTAGES :

- Adaptable for excavators from 9 to 90 tons.
- Available in hydraulic or mechanical versions
- Boom and arm assembly or special adaptation
- Drilling template on the top of the rotation to quickly fix all types adapter plate


OPTIONS :

Arden Jet on AS030
Speed Valve on AS014
Autonomous lubrication

TECHNICAL DIAGRAM

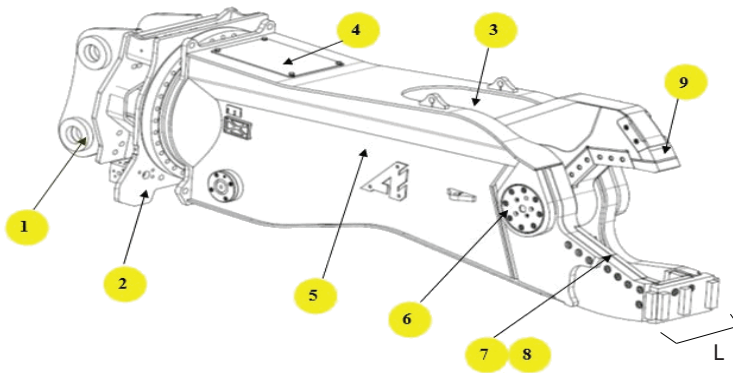

1. Bolt on top plate.
2. Continuous 360° hydraulic rotation multi motors.
3. Reversed cylinder, protected rod.
4. Speed valve (except AS014R).
5. Body in high tensile steel.
6. Adjustment side guide for the mobile jaw.
7. Reversible blades, optimised cutting design.
8. Protected blade seats.
9. Protected front nose of the mobile jaw.

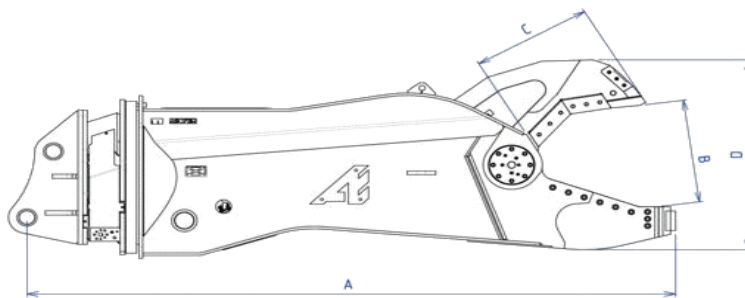

TECHNICAL SPECIFICATIONS

Technical characteristics							Beam profiles				
Carrier weight	Reference	A Tool length	B Jaw opening	C Jaw depth	D Jaw height	L Jaw width	IPE	IPN	HEA	Cutting diameter thickness solid/hollow	Tool weight
<i>t</i>	<i>Ref.</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm/mm*mm</i>	<i>kg</i>
9 - 21	AS014R01	2693	435	485	831	345	300	260	160	50 / 172*7	1400
9 - 21	AS014R01 Opt SV	2693	435	485	831	345	300	260	160	50 / 127*7	1430
12 - 30	AS021R01	2970	486	538	938	370	400	300	220	60 / 220*8	2100
16 - 39	AS030R01	3415	560	610	1062	390	450	360	260	70 / 305*10	3000
21 - 49	AS042R01	3861	650	737	1274	432	500	400	300	80 / 360*10	4250
21 - 60	AS042R02	3900	650	737	1274	432	500	400	300	80 / 360*10	4450
24 - 60	AS042R03	3590	650	737	1274	432	500	400	300	80 / 360*10	4550
24 - 60	AS055R01	4209	745	809	1392	455	600	450	360	90 / 400*12	5500
25 - 60	AS055R02	3862	745	809	1392	455	600	450	360	90 / 400*12	5650
25 - 75	AS055R03	4367	745	809	1392	455	600	450	360	90 / 400*12	5950
33 - 75	AS055R04	3929	745	809	1392	455	600	450	360	90 / 400*12	6100
34 - 75	AS073R02	4200	840	927	1552	510	700	500	450	100 / 560*16	7445
34 - 85	AS073R01	4540	840	927	1552	510	700	500	450	100 / 560*16	7360