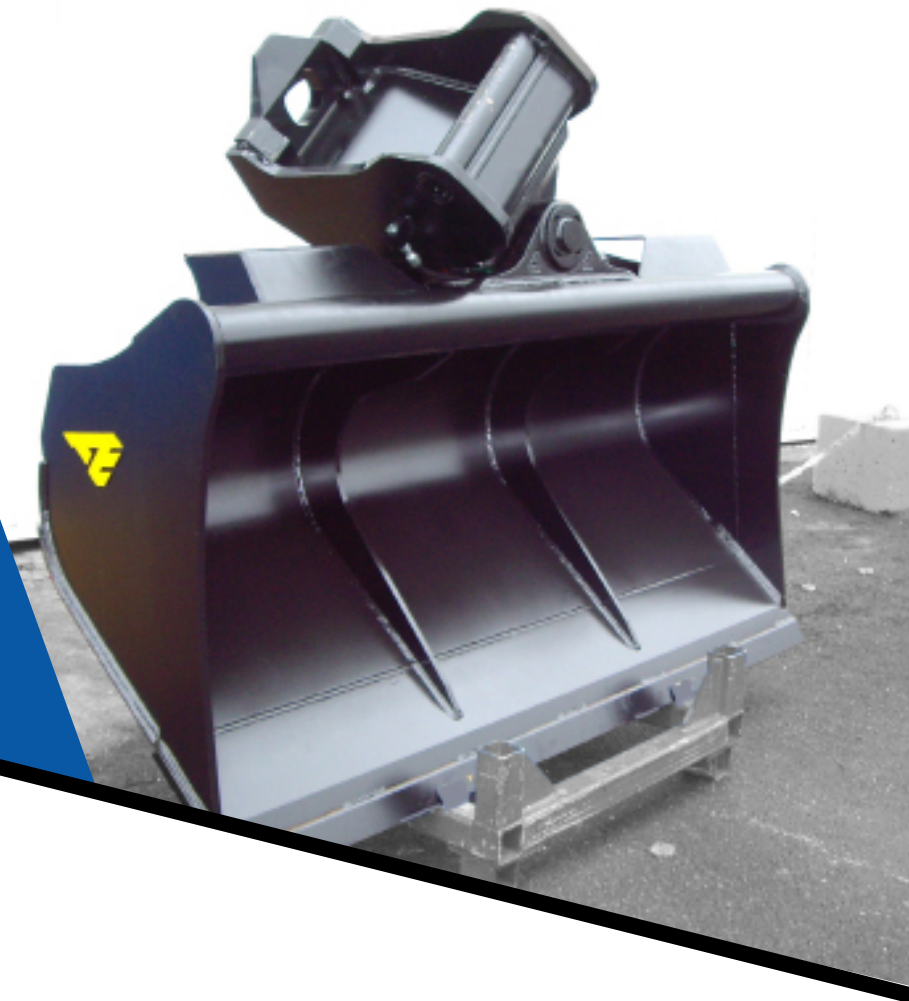


TILTING DITCHING BUCKET

CREATION AND
MAINTENANCE OF YOUR
WORKS



FEATURES:

The tilting ditching bucket range are suitable for mini excavators to 37 ton excavators.

They are fitted with one or two horizontal cylinders depending on their size.

Their tilt is 45 ° on the left and on the right.

SECURITY

PERFORMANCE

ROBUST DESIGN

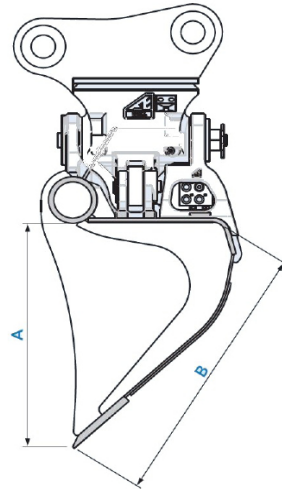
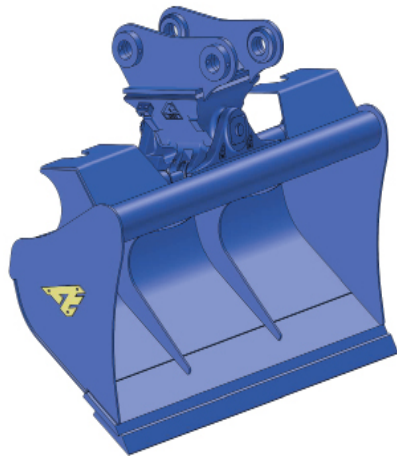
ADVANTAGES :

- 1 or 2 horizontal cylinders
- 2x45 ° tilt
- Counter blade welded on C31l, C41l, C51l
- Reversible counter blade
- Ideal for highway sloping or for any sloping surfaces




OPTIONS :

Balancing valve from C22l
Cylinder protection
Rear blade

TECHNICAL DIAGRAMS



TECHNICAL CHARACTERISTICS

Reference			A	B		Carrier weight
<i>Ref.</i>	<i>mm</i>	<i>Litres</i>	<i>mm</i>	<i>mm</i>	<i>Kg*</i>	<i>t</i>
C05I04	1020	60	280	293	90	1/2.5
C05I04	1220	70	280	293	100	1/2.5
C12I05	1220	90	279	337	129	2.6/3
C12I08	1300	150	372	448	180	3.1/6
C12I08	1400	160	372	448	186	3.1/6
C22I11	1600	250	426	540	316	7/11
C22I11	1800	285	426	540	335	7/11
C31I20	1800	540	633	719	705	12/15
C31I20	2000	600	633	719	755	12/15
C31I25	1800	675	727	782	730	12/15
C31I25	2000	750	727	782	780	12/15
C41I25	1800	680	727	795	850	16/19
C41I25	2000	760	727	795	890	16/19
C41I35	1800	940	894	866	895	16/19
C41I35	2000	1055	894	866	970	16/19
C51I35	2000	1040	886	892	1150	20/26
C51I35	2200	1160	886	892	1210	20/26
C51I40	2000	1190	964	934	1190	20/26
C51I40	2200	1325	964	934	1245	20/26
C51I45	2000	1380	1057	996	1230	20/26
C51I45	2200	1530	1057	996	1290	20/26
C60I40	2400	1360	820	880	1950	27/37
C60I40	2500	1420	820	880	1995	27/37

*Weight with quick hitch QA